

Material Receipt

- Verify condition of package.
- All product is quoted FCA factory. If there is visible damage, it is the responsibility of the buyer to file a freight claim for any damage within 24 hours of receipt.

Packaging and Moving

- Keep panels on pallets.
- Fasten panels using straps within vehicle.
- Protect edges with packing material such as: corners/blanket.

Handling of Exterior Panels

- Do not scratch the UV protective surface during handling, machining and installation.
- Panels are shipped with protective foam dividers or Clear Peel Coat between each panel.
- Always use the foam dividers or ensure Peel Coat is intact when stacking panels.
- Keep foam dividers or Peel Coat in place until ready to install.

Storage

- Keep load stored within outer wrap until use.
- Keep panels dry, by storing indoors, in original packaging until installation.
- Remove pallet straps once load is moved to storage area.
- Store panels flat, on a smooth, dry surface—ensure there are no bends or bowing in the load.
- Reseal protective wrap if partial load is used.

Clear Peel Coat on Exterior Panels


- Peel Coat is intended to protect the surface of panels during transportation and fabrication.
- Peel Coat is **not** intended for long term storage.
- Hot/cold temperatures may affect removal of the Peel Coat.
- **IMPORTANT:** Remove Peel Coat **AFTER** installation.



- **Do Not** store panels on edges or on uneven surfaces.
- **Do Not** let panels slip or slide into each other.
- **Do Not** store directly on concrete floors as moisture may migrate.
- **Do Not** store under heating or air conditioning units.
- **Damage resulting from improper storage or handling will void the warrantee.**

Exterior Single-Sided Panels

Panels are NOT identical on both sides. The Front Side faces outward (away from the building) and has the removable Peel Coat. The Back Side is designated with a factory label. Installers are responsible for making sure that the appropriate (Front) side is visible.

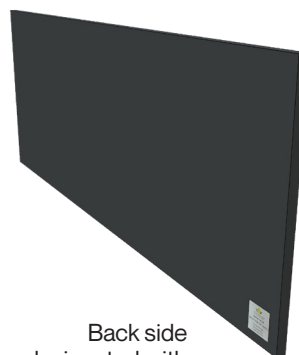

Back side designated with factory label



Remove Peel Coat PRIOR to vacating installation premises.

FIELD FABRICATION CUTTING GUIDELINES

General Safety

- Wear appropriate personal protection gear such as safety glasses and ear protection.
- Always follow manufacturer equipment and/or tool safety recommendations.
- Read and follow instruction manual before beginning work.
- Ensure all tools are properly grounded, never remove the third prong.
- Do NOT use electric power tools in a damp or wet area.
- Do NOT force tools or attachments to a job it was not designed to perform.
- Safety training, knowledge and product use is the responsibility of the facility owner, employees or designated contractor team(s).



Required Equipment—Cutting




Festool 55 REQ Plunge Cut Track Saw or equivalent



Festool 496309 blade or Aluminum/Plastic saw blade equivalent



View Panel Field Fabrication video at na.abetlaminati.com



Use track saw guide rails to improve cut accuracy and protect panel surface



Set up guide rails, and support panel on appropriate supports